




If you have any questions regarding our products please call our toll-free customer service line: 877-242-4775 or visit our website: www.ezhangchairs.com

Assembly instructions for EZ Hang Deluxe or Super Deluxe

EZ Hang Chairs is pleased that you have chosen our EZ Hang Deluxe or Super Deluxe. While utmost care is taken in the choice of materials and the highest standards are used in manufacturing, caring for your chair at home will extend its life and appearance.

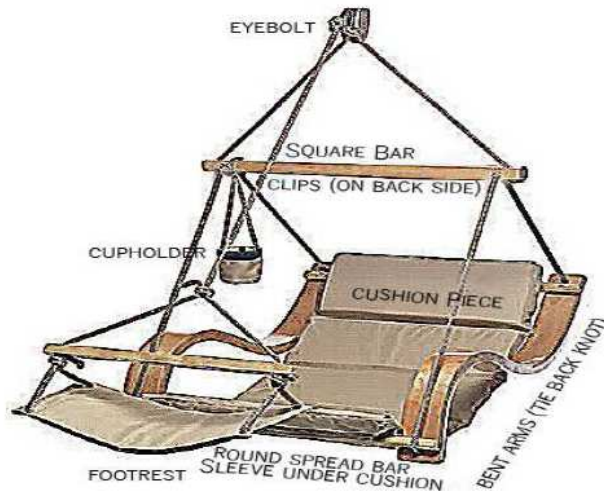

Assembly

Locate all your EZ Hang Deluxe or Super Deluxe Chair parts. Including:

- Center Cushion piece (1)
- Footrest with rope attached (1)
- Set of round spreader bars (2)
- Set of bent arms attached to overhead square bar via ropes (2)
- hardware pack wrapped inside cupholder (4)
- 1" inch aluminum support poles for extension fold at front of chair (2) (Super Deluxe only)
- Wooden dowel with rope attached for Super deluxe lounge extension (1) (Super Deluxe only)

Place wooden bent arms on the ground making sure the arms are face up and that the ropes are not twisted or turned, impeding the next step. Insert the rope through the hole on the back of the bent arms and tie a small knot (The brake should be on the backside/if they are on front, simply untie the front knot and reverse the clips to the back side.)

Place the cushion part of the chair with the "EZ Hang" logo at the top right in between the bent arms on the ground.

- Thread the two round spreader bars through the sleeves underneath the cushion (one sleeve is on top and bottom of the main cushion.)

- Connect the cut away section of the round spreader bars onto the top matching section of the bent wood arms. (Refer to the picture to make sure the bent wood arms are set correctly.)
- Slide the 1” round poles in each side of the lounge flap at the front of the chair and seal with the Velcro cover to lock each pole in place. (Super Deluxe model Only).
- Insert dowel with rope through the lounge extension and tie on opposite side. Fold lounge extension underneath chair and connect at the clips or straps. (Super Deluxe only)
- Using the hardware provided, connect the round spreader bars to the bent wooden arms by placing the hexbolt through the spreader bar and bent wood arms from front to back. Bolt down firmly using the washer and nut. Repeat this procedure in all four corners of the chair. Use the wrench to tighten the bolt until it is flush with the front side of the wood.

Installing eyebolt

Locate ceiling joist (use stud finder to tap and verify with small nail.) Be sure to locate the exact center. Pre-drill a starter hole using a 3/16th drill bit. Screw in the supplied eye lag until all that is visible is round section. Do not loosen or adjust once in place. Caution (swinging could loosen the eyebolt and compromise the sturdiness.)

Fine tuning adjustment

Your chair can be adjusted back and forward by manipulating the ropes on the overhead square bar. **The brakes (included in the “hardware pack,” must be on the back side of the square bar and must sit tight against the square bar once the recline has been set.**

Disclaimer

Please note: EZ Hang chairs and all agents or representatives thereof cannot assume responsibility for special, indirect, or consequential damages or contingent liability for use of this product in a manner not expressly intended by the manufacturer. End consumer is ultimately responsible for verifying proper installation of eye-lag/hook assembly according to guidelines explained here within.

Super deluxe version pictures show below with extension Tucked and secured underneath :

